


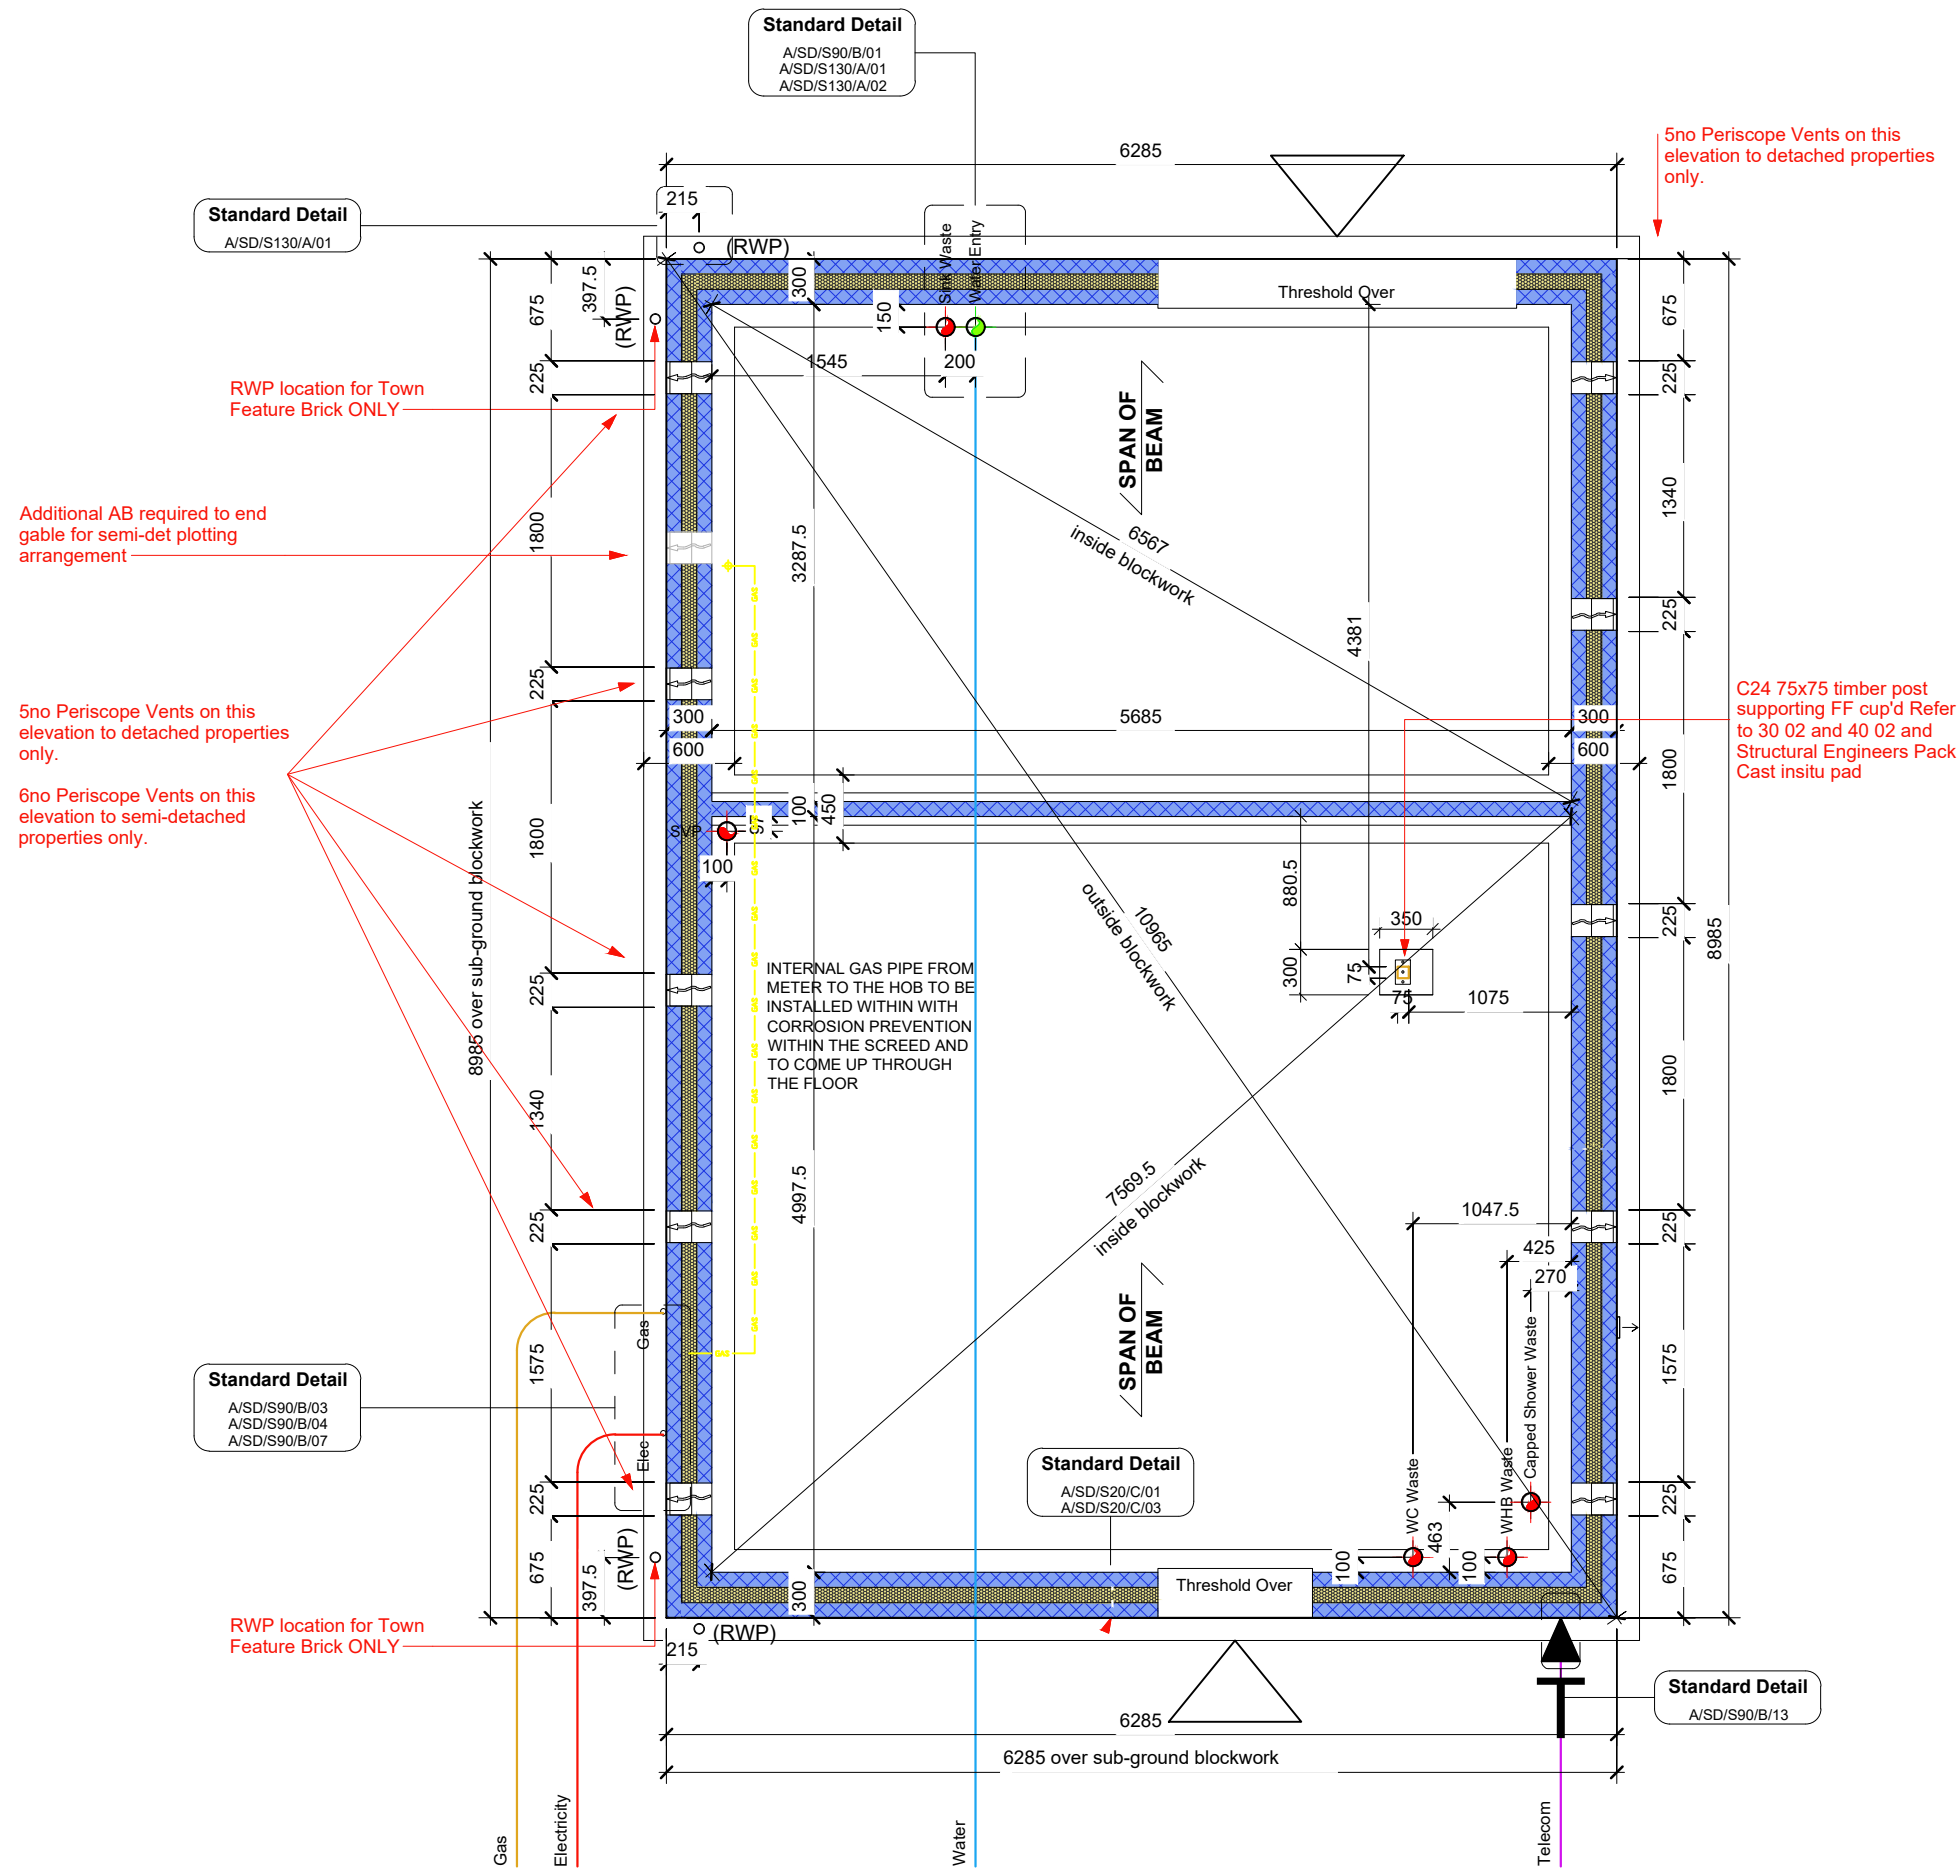

1 Foundation 1-50
1 : 50

Revision Schedule			
Rev	Date	Description	Drn By
C1	09.12.25	Construction Issue	-

Substructure Wall Legend (100mm Cavity)	
	Standard External Insulated Cavity Wall (Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	External Uninsulated Cavity Wall (To Garage etc - Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	Party Wall (Below Ground) 100mm aerated concrete block (3.6N/mm²) 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aerated concrete block (3.6N/mm²)
	Internal Blockwork Partition (Below Ground) 100mm aerated concrete block (3.6N/mm²) (Suspended ground floor beam manufacturer's coursing blocks / bricks as required)
	Sleeper Wall 100mm aerated concrete block (7.3N/mm²) to underside of suspended ground floor beams

Refer to current Construction Specification for further details

CONSTRUCTION

Bellway
www.bellway.co.uk

Bellway Homes (Eastern Counties)
Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Project

Somersham
St Ives Road
Working Drawings

Drawing Title
The Coppersmith-Life **CSL-3B-2S-0**
1026 ft² | 3b Det / Semi | All Variants
Foundation Layout

Drawing Created By Group	First Issue Date 28.03.25	Scale(s) 1 : 50
Project No BI01	Drg Status Construction	Revision C1
Drawing No. BI01/1026CSL/30/0/01		