

GENERAL NOTES - BEAM AND BLOCK

1. Building blocks to have a max. density of 1500kg/m³, and a crushing strength of 7.0N/mm².
2. Where support width exceeds 100mm split course to be turned through 90 degrees.
3. Once the beams and blocks have been installed, the floor should be suitably grouted with a nominal 4:1 sharp sand cement mix.

4. Any small holes required through the floor may be formed by removing infill blocks as necessary and making good with insitu concrete by the general contractor.

2013 Regs:-  
OVERALL U-VALUE OF FLOOR = 0.133 W/m²/°K  
(WHITE EPS BLOCKS)

2021 Regs:-  
OVERALL U-VALUE OF FLOOR = 0.12 W/m²/°K  
(GREY EPS)

LOADING ALLOWANCES

- Live load: 1.5 kN/m²  
Finishes: 1.8 kN/m²  
Part allowance: 0.00 kN/m²

Partitions on ground floor not to exceed 1.0 kN/m run (based on timber stud).

- Self weight: See calcs  
Floor make up: 75mm structural concrete topping over 150mm thick structural overlay sheet over beams with EPS blocks between.

Bearing level is: FFL - 375mm

BLOCK KEY:

- W = Wide poly block (485mm)  
N = Narrow poly block (295mm)  
C = 100mm thick poly inlay sheet (tolerance) cut after inserting block runs.

VENTILATION:

AB Denotes location of airbricks & vents.  
Each airbrick offers not less than 6000mm² ventilation.

V Denotes approx. position of vents to inner walls.

Floor to provide:- 1500mm² per metre run of external wall OR... 500mm² per square metre of floor area whichever is greater

ENSURE AIRBRICKS ARE POSITIONED AS SHOWN

Revision Schedule

| Rev | Date     | Description        | Drn By |
|-----|----------|--------------------|--------|
| C1  | 09.12.25 | Construction Issue | -      |

Ground Floor Beam Schedule



| Qty | Length | Description           | Weight (kg) |
|-----|--------|-----------------------|-------------|
| 15  | 3500   | B2 Prestressed Beam   | 115         |
| 11  | 5200   | RD09 Prestressed Beam | 333         |

GF Overlay Sheet Schedule

| Location     | Qty of Overlay Sheet | Qty of Poly Edge Strip (75mm high) |
|--------------|----------------------|------------------------------------|
| Ground Floor | 46.72 m²             | 38 m                               |


- W - Wide Poly Block (485mm wide)  
N - Narrow Poly Block (295mm wide)  
C - 100mm thick poly inlay sheet (tolerance), cut after inserting block runs.

Additional AB required to end gable for semi-det plotting arrangement

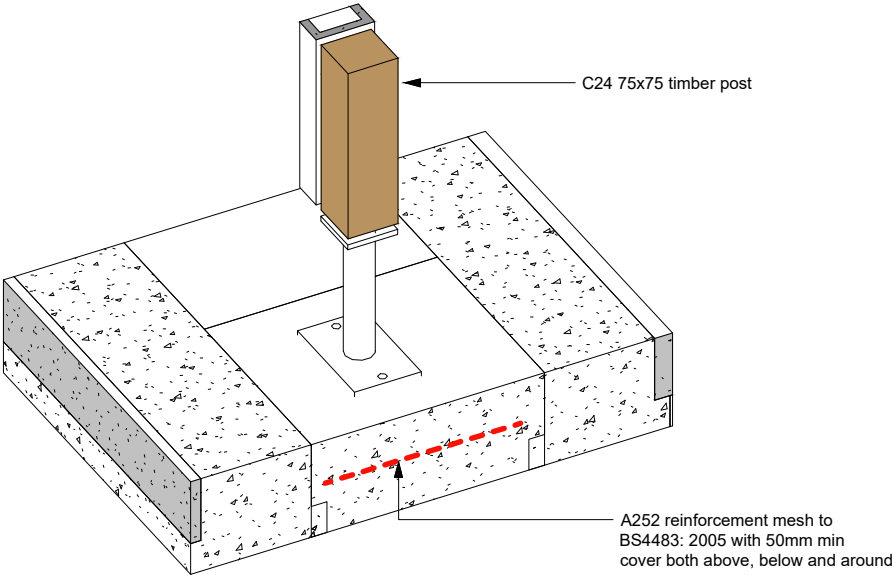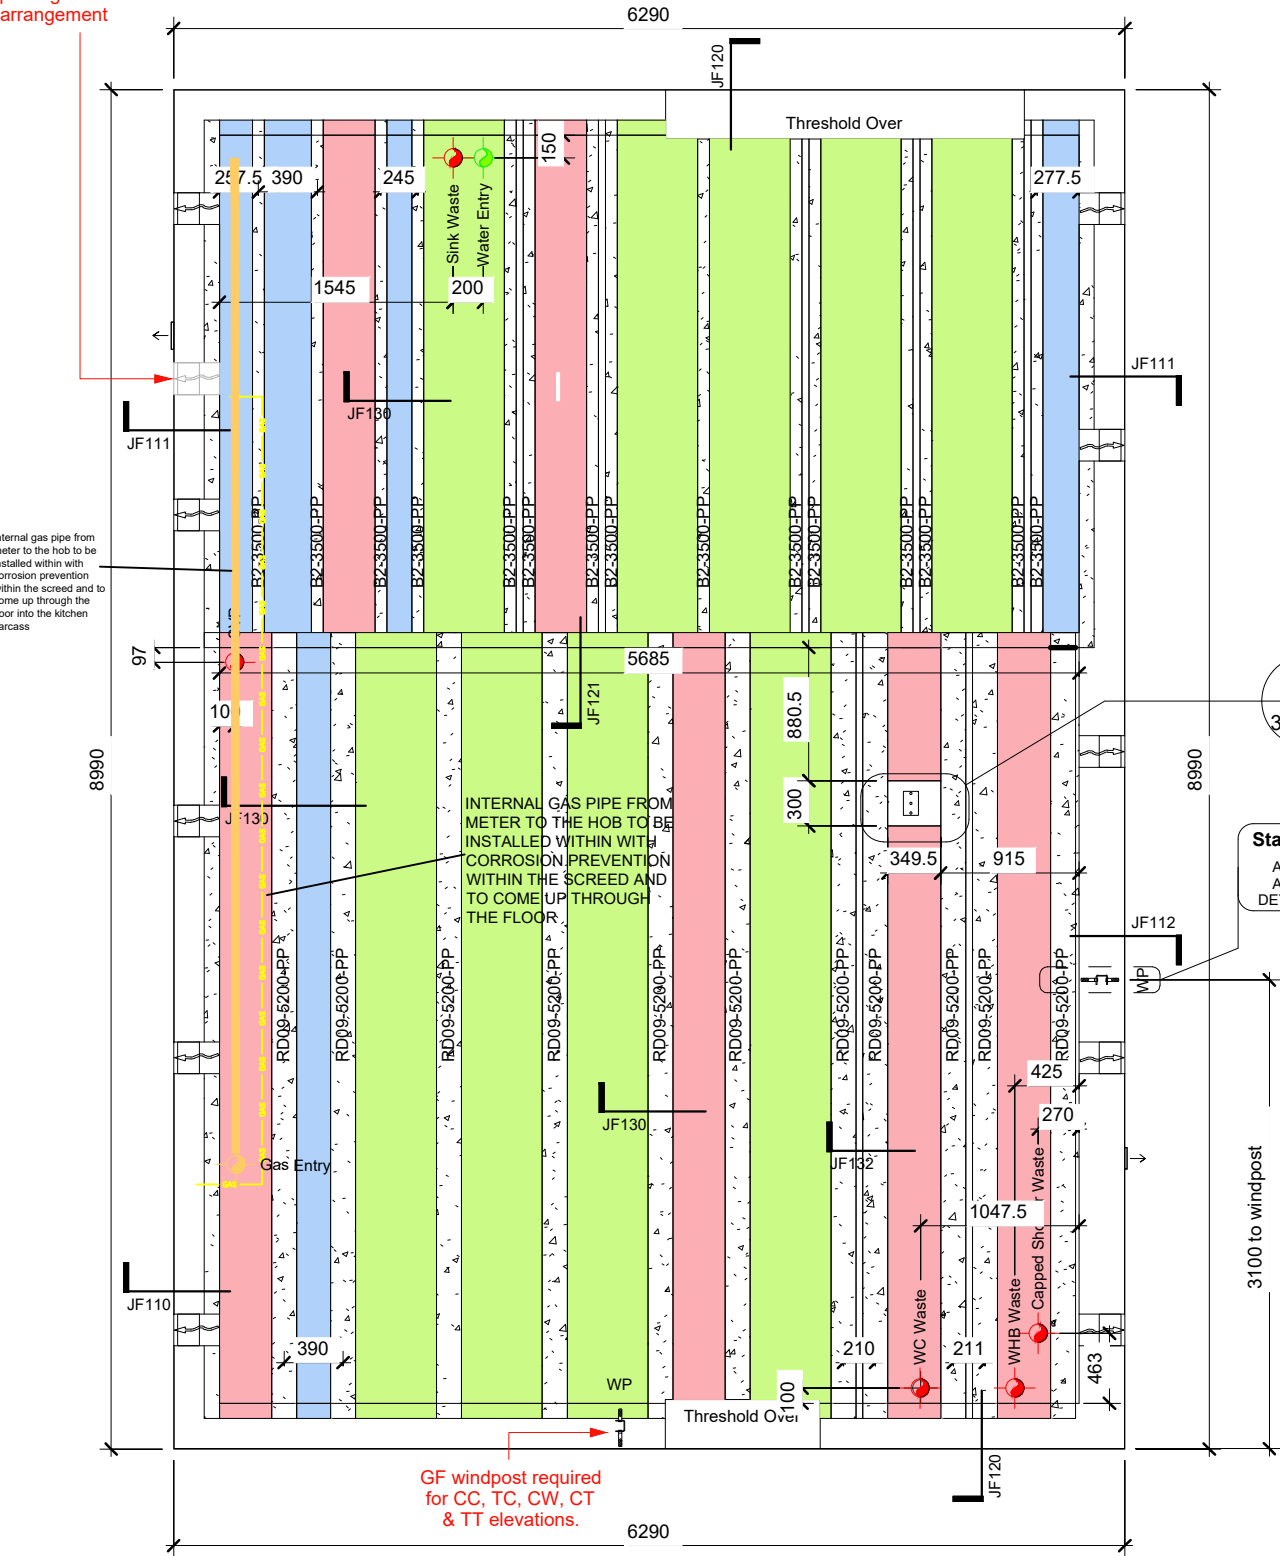

2 Post Detail Isometric

3  
30/0/02  
Standard Detail  
A/SD/S20/C/06  
A/SD/S20/C/01  
DETACHED ONLY

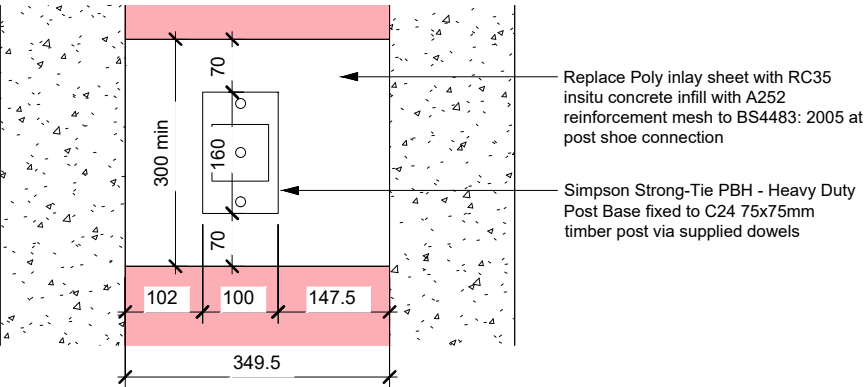

3 Post Base Detail Plan

1 : 10

1 Beam Layout 1-50

1 : 50

Plots 08, 14, 50 (AS) & 01, 03, 09, 18, 19, 49 OPP



Bellway Homes (Eastern Counties)

Building 2030, Cambourne Business Park,  
Cambridgeshire CB23 6DW  
Tel: 01480 425 200

Project

Somersham

St Ives Road  
Working Drawings

Drawing Title

The Coppersmith-Life

CSL-3B-2S-0

1026 ft² | 3b Det / Semi | All Variants  
Structural Floor Beam Layout

|                             |                               |                          |
|-----------------------------|-------------------------------|--------------------------|
| Drawing Created By<br>Group | First Issue Date<br>April '25 | Scale(s)<br>As indicated |
| Project No<br>BI01          | Drng Status<br>Construction   | Revision<br>C1           |

Drawing No. BI01/1026CSL/30/0/02

Do not scale - if in doubt, ask