

Revision Schedule			
Rev	Date	Description	Drn By
C1	09.12.25	Construction Issue	-

Substructure Wall Legend (100mm Cavity)

	Standard External Insulated Cavity Wall (Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	External Uninsulated Cavity Wall (To Garage etc - Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	Party Wall (Below Ground) 100mm aircrete block (3.6N/mm²) 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aircrete block (3.6N/mm²)
	Internal Blockwork Partition (Below Ground) 100mm aerated concrete block (3.6N/mm²) (Suspended ground floor beam manufacturer's coursing blocks / bricks as required)
	Sleeper Wall 100mm aerated concrete block (3.6N/mm²) to underside of suspended ground floor beams

Refer to current Construction Specification for further details

CONSTRUCTION

www.bellway.co.uk

Bellway Homes (Eastern Counties)

Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Project

Somersham
St Ives Road
Working Drawings


Drawing Title

The Draftsman-Life **DML-3B-2S-0**

934 ft² | 3b Semi/Mid | All Variants
Foundation Blockplan - Semi

Drawing Created By	First Issue Date	Scale(s)
Group	28.03.25	As indicated
Project No	Drg Status	Revision
BI01	Construction	C1
Drawing No.		BI01/934DML/30/0/02

Do not scale - if in doubt, ask

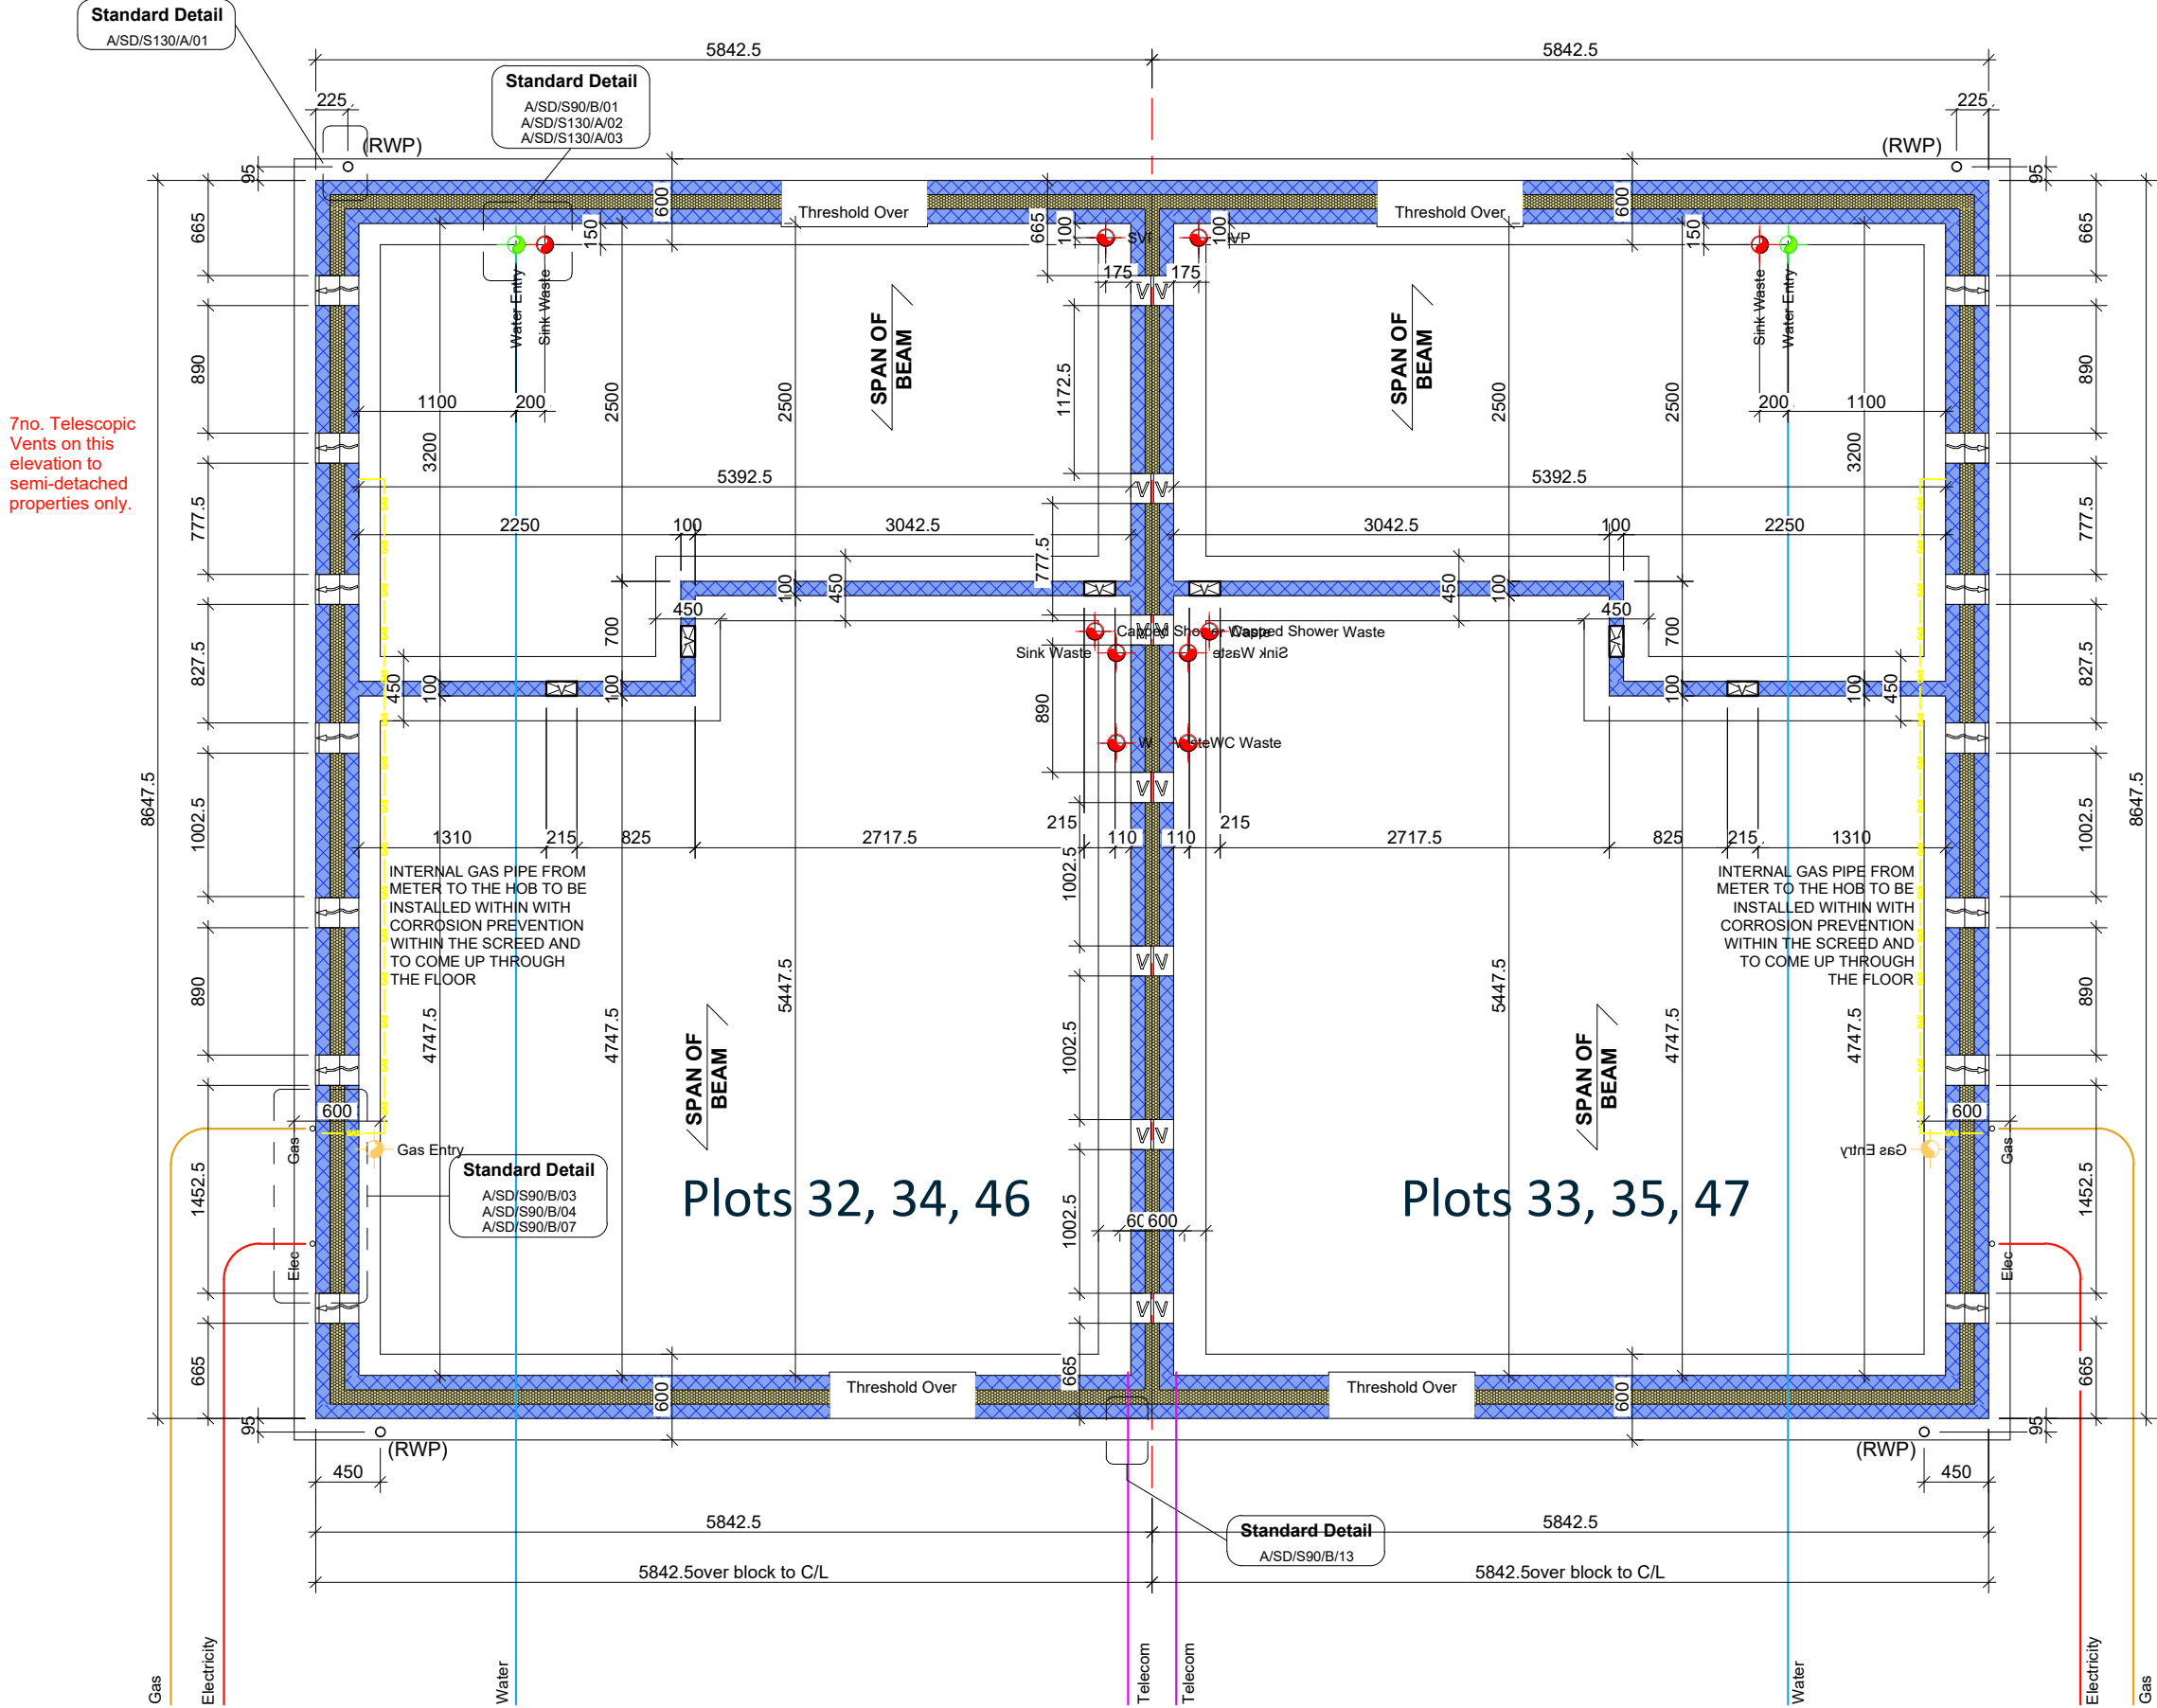

7no. Telescopic
Vents on this
elevation to
semi-detached
properties only.

1 Foundation Plan with Semi Detached Service Entry Points
1 : 50

Plots 32, 33, 34, 35, 46 & 47