

GENERAL NOTES - BEAM AND BLOCK

1. Building blocks to have a max. density of 1500kg/m³, and a crushing strength of 7.0N/mm².
2. Where support width exceeds 100mm split course to be turned through 90 degrees.
3. Once the beams and blocks have been installed, the floor should be suitably grouted with a nominal 4:1 sharp sand cement mix.
4. Any small holes required through the floor may be formed by removing infill blocks as necessary and making good with insitu concrete by the general contractor.

2013 Regs:-
OVERALL U-VALUE OF FLOOR = 0.137 W/m²/°K
(WHITE EPS BLOCKS)

2021 Regs:-
GROUND FLOORS TO ACHIEVE A MAXIMUM
U-VALUE OF 0.12 W/M²/°K (GREY EPS)

LOADING ALLOWANCES

- Live load: 1.5 kN/m²
Finishes: 1.8 kN/m²
Part allowance: 0.00 kN/m²
- Partitions on ground floor not to exceed 1.0 kN/m run (based on timber stud).
- Self weight: See calcs
Floor make up: 75mm structural concrete topping over 150mm thick structural overlay sheet over beams with EPS blocks between.
- Bearing level is: FFL - 375mm

BLOCK KEY:

- W = Wide poly block (485mm)
- N = Narrow poly block (295mm)
- C = 100mm thick poly inlay sheet (tolerance) cut after inserting block runs.

VENTILATION:

- AB Denotes location of airbricks & vents.
Each airbrick offers not less than 6000mm² ventilation.
- V Dennotes approx. position of vents to inner walls.
- Floor to provide:- 1500mm² per metre run of external wall OR... 500mm² per square metre of floor area whichever is greater

ENSURE AIRBRICKS ARE POSITIONED AS SHOWN

Revision Schedule

Rev	Date	Description	Drn By
C1	09.12.25	Construction Issue	-

Ground Floor Beam Schedule


Qty	Length	Description	Weight (kg)
6	4950	B2 Prestressed Beam	163
5	3400	B2 Prestressed Beam	112
6	2700	B2 Prestressed Beam	89
6	5650	RD09 Prestressed Beam	362

GF Overlay Sheet Schedule

Location	Qty of Overlay Sheet	Qty of Poly Edge Strip (75mm high)
Ground Floor	42.98 m²	27.5 m

- W - Wide Poly Block (485mm wide)
- N - Narrow Poly Block (295mm wide)
- C - 100mm thick poly inlay sheet (tolerance), cut after inserting block runs.

INTERNAL GAS PIPE FROM METER TO THE HOB TO BE INSTALLED WITHIN WITH CORROSION PREVENTION WITHIN THE SCREED AND TO COME UP THROUGH THE FLOOR

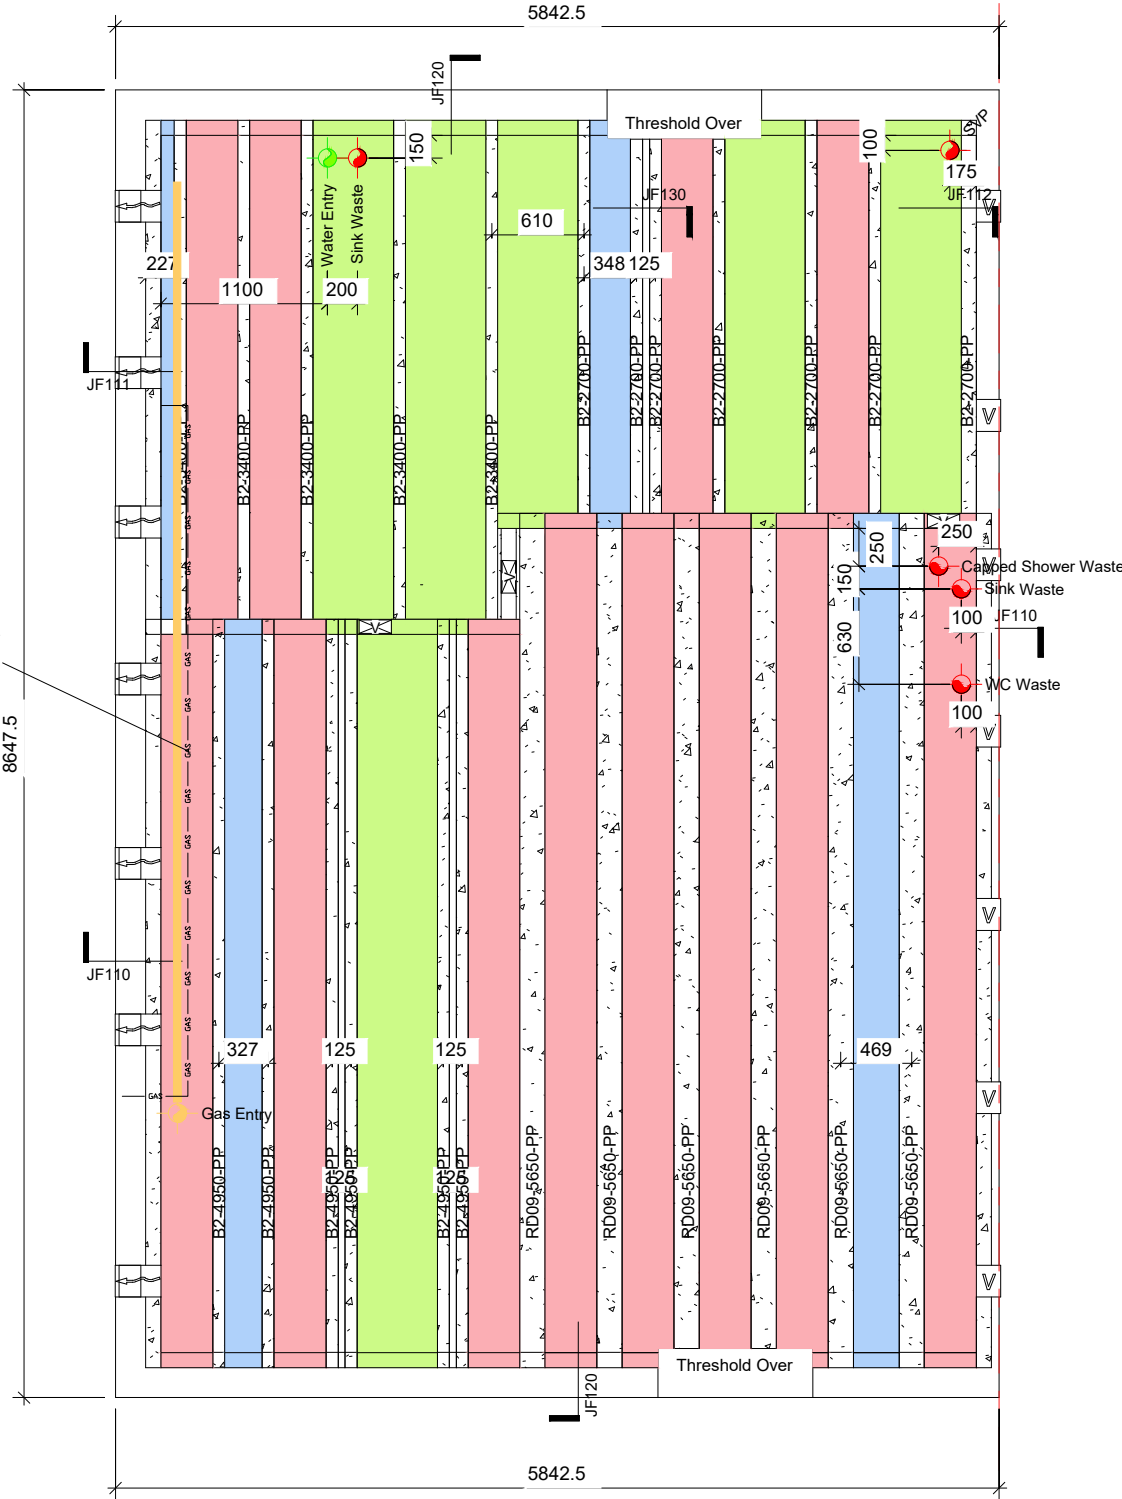

1 Beam Layout 1-50
1 : 50

Plots 32, 34, 36, 46 (AS) & 33, 35, 47 (OPP)

CONSTRUCTION

Bellway

www.bellway.co.uk

Bellway Homes (Eastern Counties)

Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Project

Somersham
St Ives Road
Working Drawings

Drawing Title

The Draftsman-Life

DML-3B-2S-0

934 ft² | 3b Semi/Mid | All Variants

Structural Floor Beam Layout

Drawing Created By	First Issue Date	Scale(s)
Group	28.03.25	1 : 50
Project No	Drq Status	Revision
BI01	Construction	C1
Drawing No.	BI01/934DML/30/0/03	

Do not scale - if in doubt, ask