
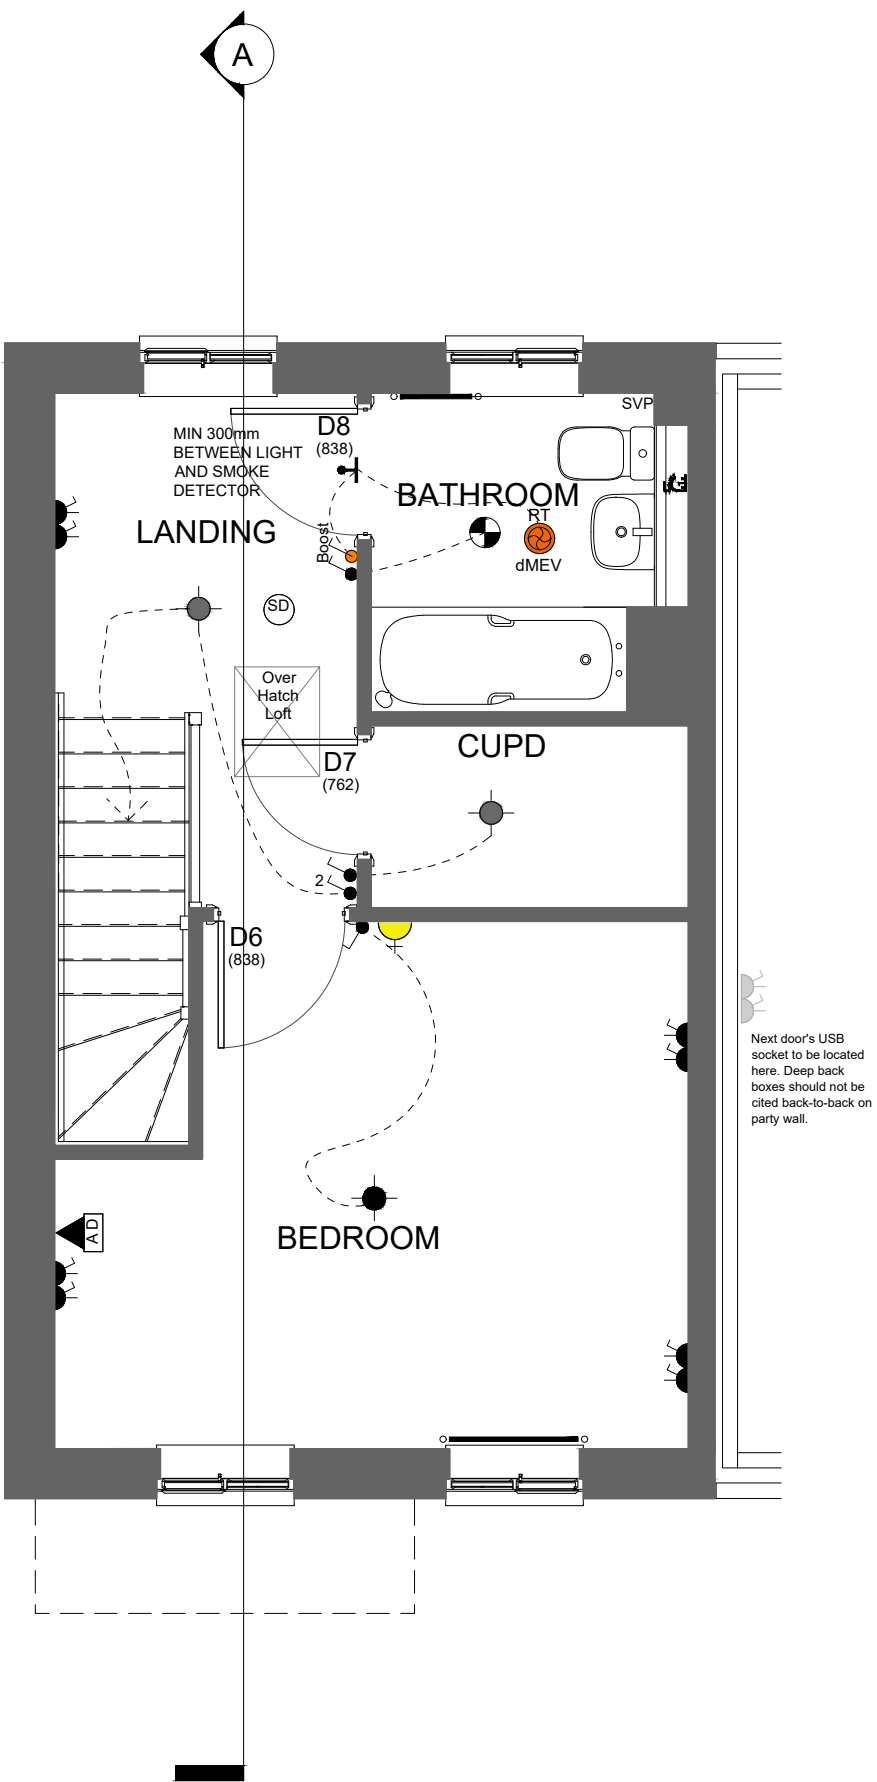


 dMEV	Ceiling mounted extract fan (arrow indicates ducting direction, RT = roof terminal) Orange = dMEV for 2021 regs only (dMEV = Decentralised Mechanical Extract Ventilation - System 3) See 95/0/02 for details of individual fan requirements
	Wall mounted extract fan (installed @ 2000mm above FFL to centreline). Orange = dMEV for 2021 regs only (dMEV = Decentralised Mechanical Extract Ventilation - System 3) See 95/0/02 for details of individual fan requirements
	Orange Boost Switch - lightswitch to control boost function of dMEV fan (2021 specification only)
	Orange Isolator Switch - 2021 specification switch only. Text identifies use (IS - Fan = Extract Fan Isolator AC Solar = Solar Inverter AC Isolator)

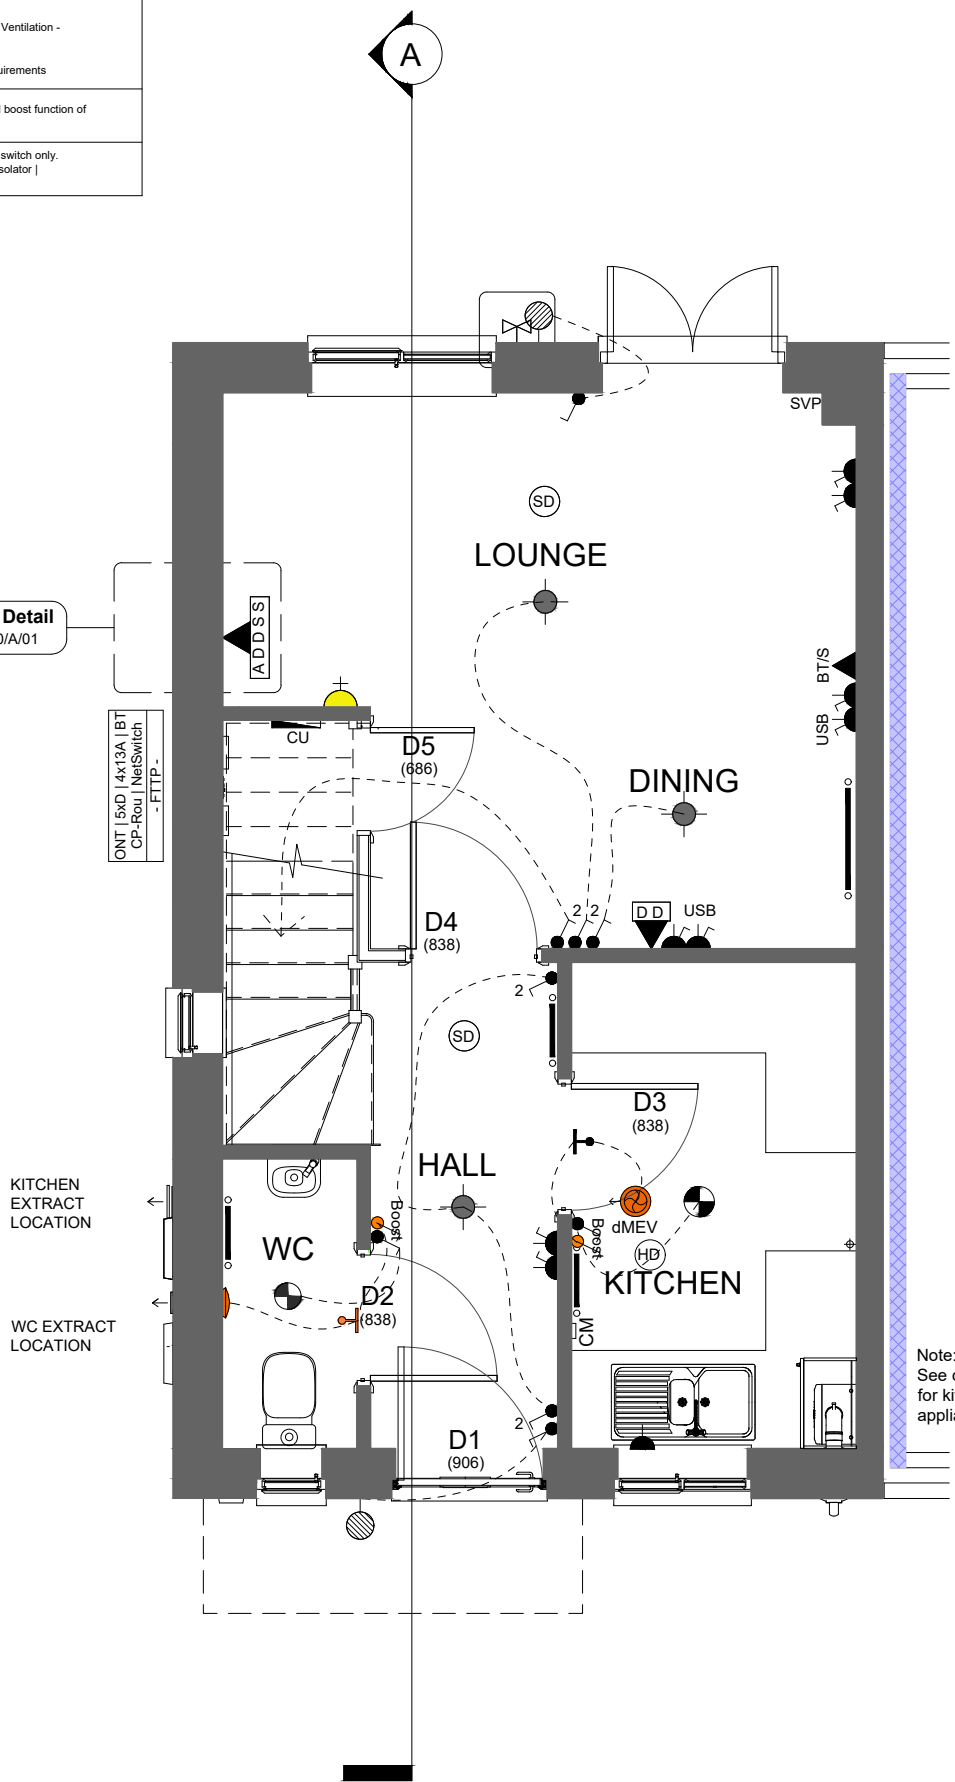

Revision Schedule			
Rev	Date	Description	Drn By
C1	02.12.25	Construction Issue	C1

	Pendant light fitting		Weather compensator
	Batten holder fitting		 Ceiling mounted detector Smoke Heat
	IP65 recessed spotlight		Wall mounted CO detector (installed @ 150mm below ceiling)
	IP65 recessed spotlight to be supplied with Fire Hood / Shroud		20VA Dual volt shaver socket (1350mm to underside above FFL)
	External Wall mounted light fitting		BT point ⁽³⁾ Master Secondary
	Remote switches to unswitched sockets ⁽²⁾ Single Multi (8no max)		BT Customer Splice Point located externally (conduit to be installed 300-770mm above FGL)
	Light switch 1 way ⁽¹⁾ 1 2 3 gang		Room thermostat ⁽¹⁾ Zone 1 Zone 2
	Light switch 2 way ⁽¹⁾ 1 2 3 gang		Fan isolator switch (installed to centreline of door, 2150mm above FFL to underside of switch)
	Light switch - Intermediate ⁽¹⁾		Shower isolator switch ⁽¹⁾
	13A Single Un-switched fused spur connection		Wall mounted extract fan (installed @ 2125mm above FFL to centreline)
	13A Single double pole switched fused spur connection		Ceiling mounted extract fan (arrow indicates ducting direction, RT = roof terminal)
	20A DP Switch Flex Outlet w/ Neon indicator (for Immersion Heater)		2 module 4 module
	Single unswitched socket (13A) high level ⁽²⁾ low level ⁽²⁾		A = Co-axial aerial D = CAT6 data - = Blank
	Single switched socket (13A) high level ⁽²⁾ low level ⁽²⁾		Lounge / Media Plate; Co-axial aerial, 2x CAT6 data, 2x satellite & 2x 13A double socket outlets ⁽²⁾
	Double switched socket (13A) high level ⁽²⁾ low level ⁽²⁾		Wall mounted Electricity meter box. Base of box / structural opening @ 900mm (12no bc) above external FGL
	Cooker outlet plate ⁽³⁾ with 6mm Ø cable to 45A double pole switch		FTTP Key:- ONT:- Optical Network Termination unit, complete with Battery Backup Unit (BBU) CP-Rou:- Customer Provided Router NetSwitch:- Customer Provided Unmanaged Gigabit Network Switch
	45A double pole switch ⁽²⁾ with 6mm Ø cable to distribution board		
	Hot water cylinder connection box (Blank Faceplate) ⁽²⁾		
	Consumer unit (underside of unit installed 1350mm above FFL)		
	25A Flex outlet plate high level ⁽²⁾ low level ⁽²⁾		
	Frost thermostat		

Submain Isolator must be installed where cable length from meter to consumer unit exceeds 3m
Refer to Section 110 of STANDARD DETAILS - GROUP HOUSE TYPES for typical details

- ⁽¹⁾ Switches / controls installed @ 1200mm above FFL to top of fitting
⁽²⁾ Switches installed @ 1050mm above FFL to underside of fitting
(sockets located in kitchen islands to be mounted @ 750mm above FFL)
⁽³⁾ Switches installed @ 450mm above FFL to underside of fitting

General Note - sockets located 400mm from internal corners of rooms to centrelines of sockets, unless otherwise stated

TENDER


www.bellway.co.uk

Bellway Homes Limited (Eastern Counties)
Building 2030, Cambourne Business Park
Cambourne, Cambridgeshire, CB23 6DW
Tel: 01480 425200

Project
Somersham
St Ives Road
Working Drawings

Drawing Title
The Halstead
630 ft² | 1b Semi-Det | Country Brick
Electrical Layouts

Drawing Created By FDL	First Issue Date April '25	Scale(s) 1 : 50
Project No BI01	Drg Status	Revision C1
Drawing No.		BI01 / 630HA / 15 / 01

Do not scale - if in doubt, ask