


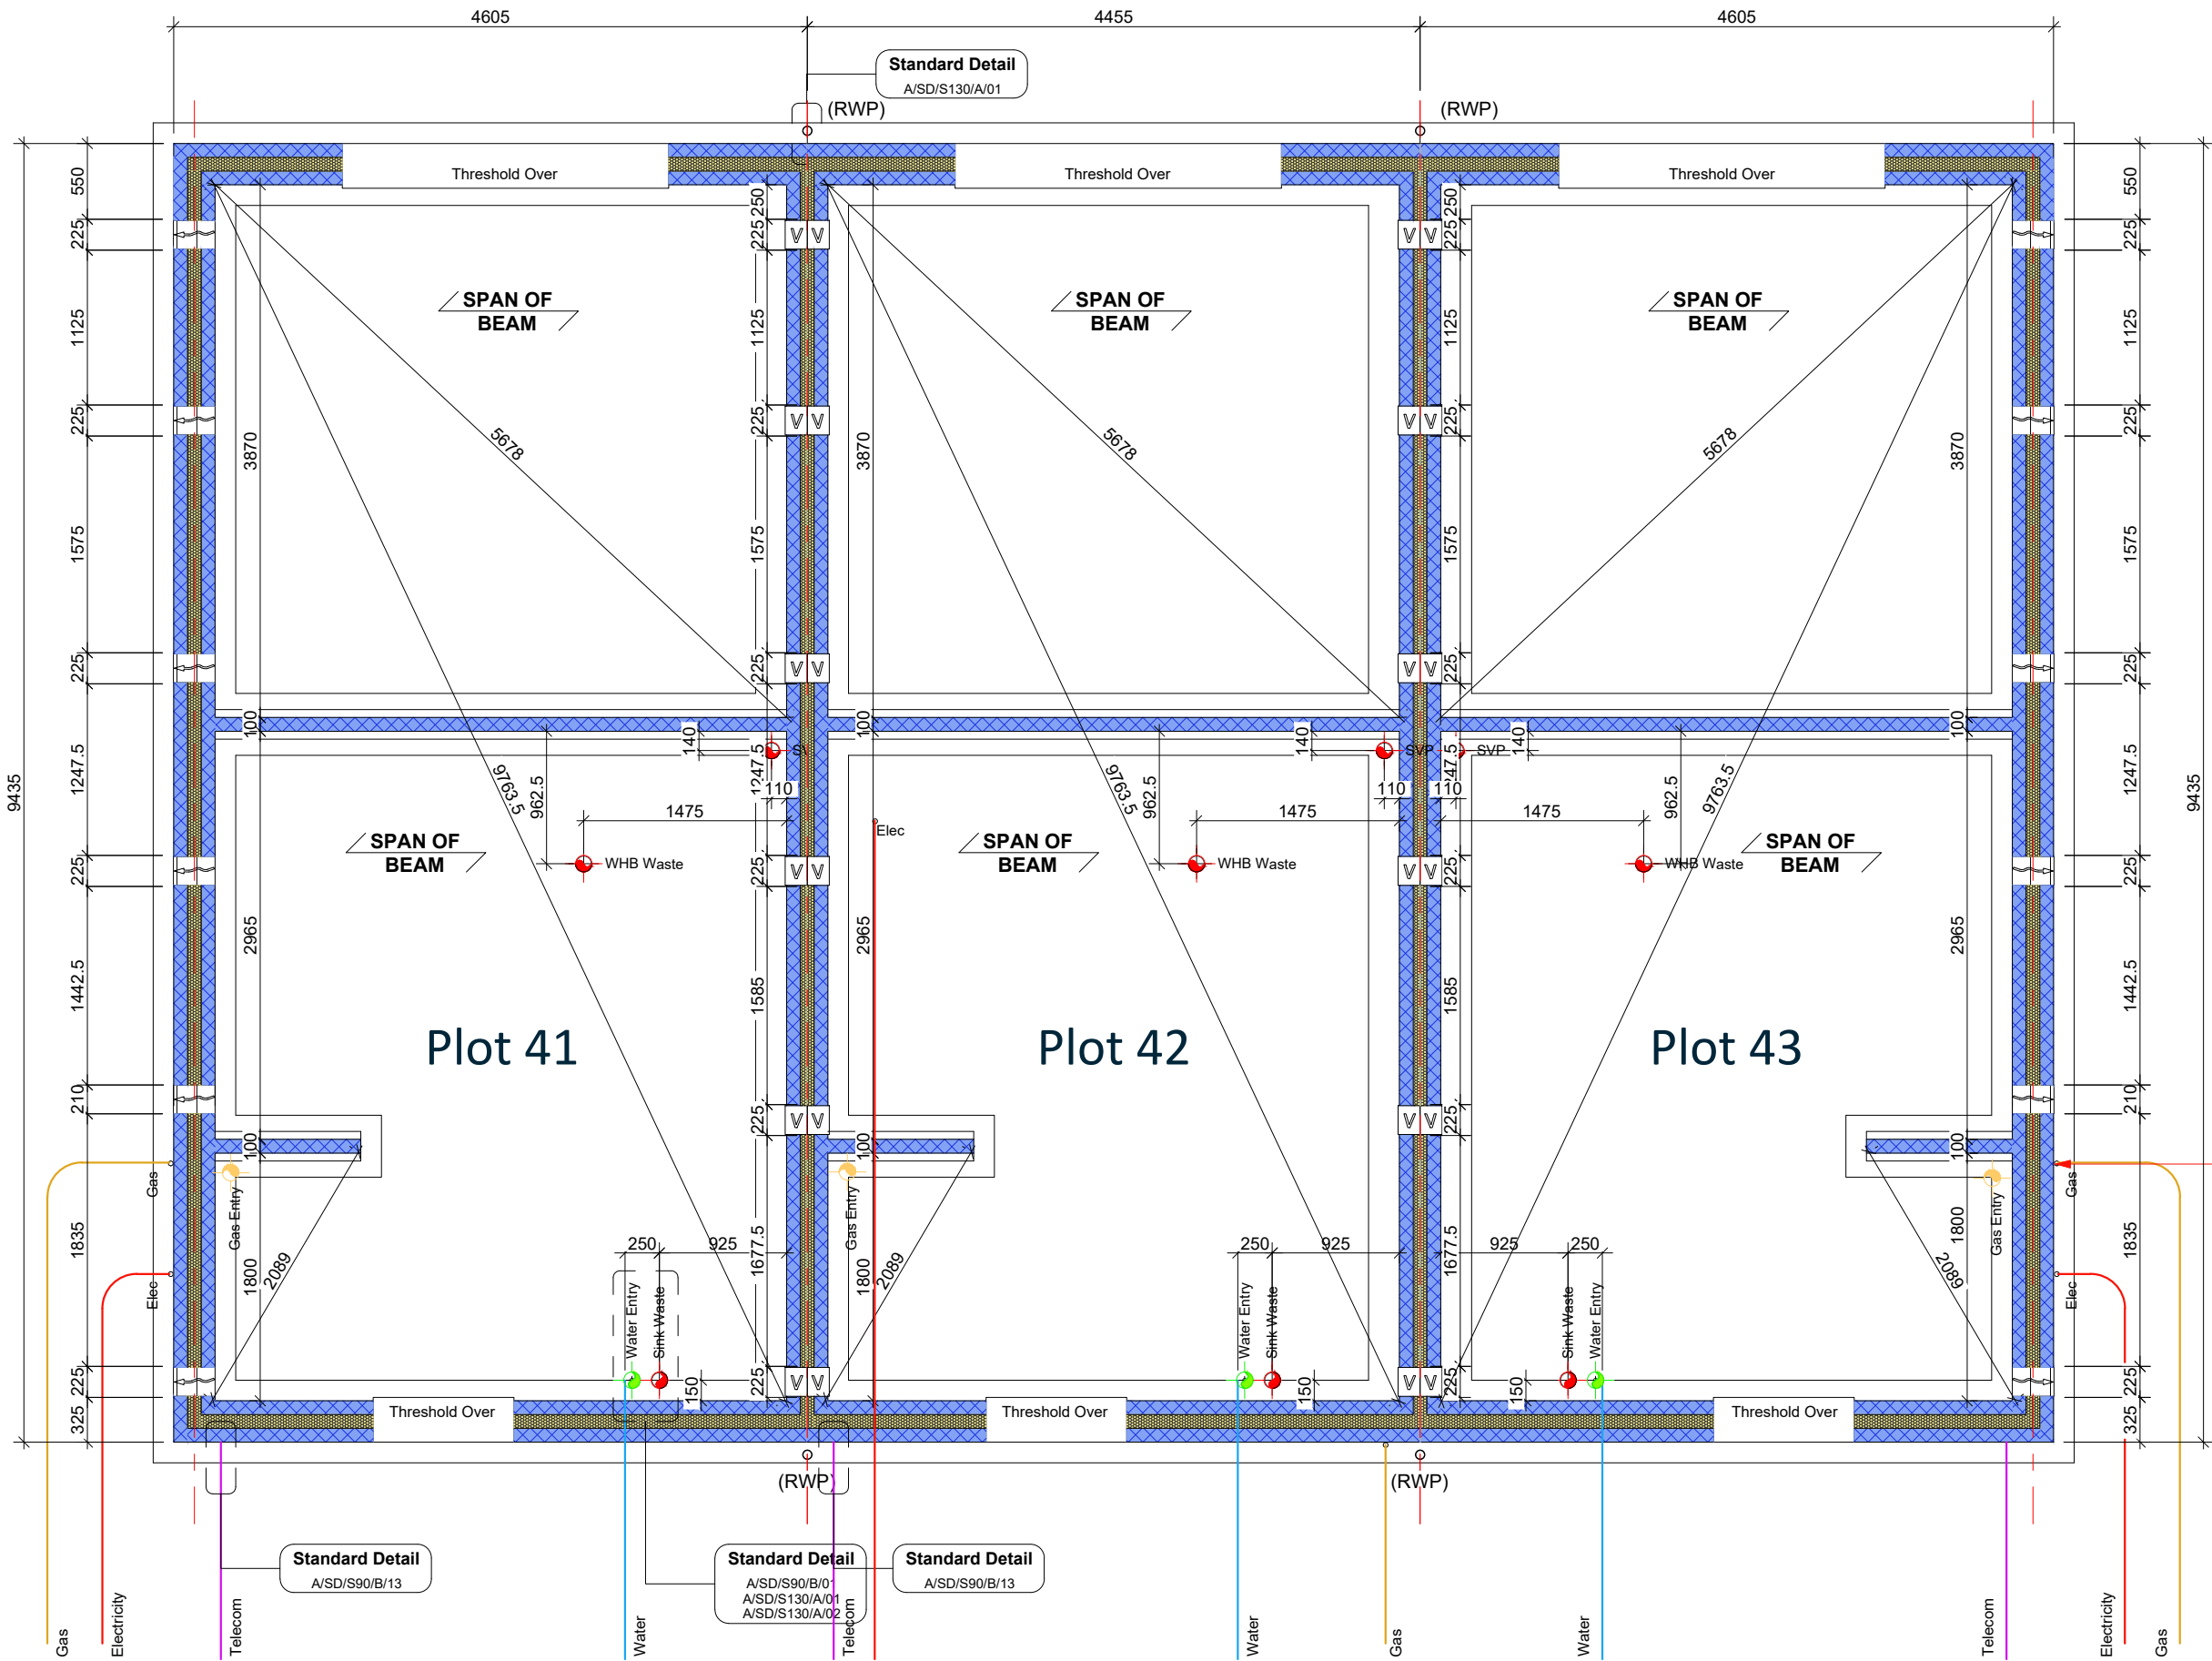

Revision Schedule			
Rev	Date	Description	Drn By
C1	09.12.25	Construction Issue	FDL
C2	05.03.26	Mid terrace elec shown extending to understairs cupboard.	FDL

Substructure Wall Legend (100mm Cavity)	
	Standard External Insulated Cavity Wall (Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	External Uninsulated Cavity Wall (To Garage etc - Below Ground) 100mm blocks (3.6N/mm²) upto 150mm below external ground level, then class B engineering brickwork (102.5mm) to DPC level 100mm cavity 100mm aerated concrete block / coursing bricks (3.6N/mm²)
	Party Wall (Below Ground) 100mm aircrete block (3.6N/mm²) 100mm cavity with expanded polystyrene board (thermal conductivity 0.038 W/m²/K) 100mm aircrete block (3.6N/mm²)
	Internal Blockwork Partition (Below Ground) 100mm aerated concrete block (3.6N/mm²) (Suspended ground floor beam manufacturer's coursing blocks / bricks as required)
	Sleeper Wall 100mm aerated concrete block (3.6N/mm²) to underside of suspended ground floor beams

Refer to current Construction Specification for further details

Ensure min
180mm between
gas pipe and air
brick

CONSTRUCTION

www.bellway.co.uk

Bellway Homes (Eastern Counties)
Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Building Regulations
2013 & 2021
Compliant

Project

Somersham
St Ives Road
Working Drawings

Drawing Title		
The Hooper-Life		
790 ft² 2b Semi/Terr All Variants		
Foundation Blockplan - Terrace		
HPL-2B-2S-0		
Drawing Created By	First Issue Date	Scale(s)
Group	28.03.25	1 : 50
Project No	Drng Status	Revision
BI01	Construction	C2
Drawing No.		
BI01/790HP/30/0/03		