

GENERAL NOTES - BEAM AND BLOCK

1. Building blocks to have a max. density of 1500kg/m³, and a crushing strength of 7.0N/mm².
2. Where support width exceeds 100mm split course to be turned through 90 degrees.
3. Once the beams and blocks have been installed, the floor should be suitably grouted with a nominal 4:1 sharp sand cement mix.

4. Any small holes required through the floor may be formed by removing infill blocks as necessary and making good with insitu concrete by the general contractor.

2013 Regs:-
OVERALL U-VALUE OF FLOOR = 0.133 W/m²/°K
(WHITE EPS BLOCKS)

2021 Regs:-
GROUND FLOORS TO ACHIEVE A MAXIMUM
U-VALUE OF 0.11 W/M²/°K (GREY EPS)

LOADING ALLOWANCES

Live load: 1.5 kN/m²
Finishes: 1.8 kN/m²
Part allowance: 0.00 kN/m²

Partitions on ground floor not to exceed 1.0 kN/m run (based on timber stud).

Self weight: See calcs
Floor make up: 75mm structural concrete topping over 150mm thick structural overlay sheet over beams with EPS blocks between.

Bearing level is: FFL - 375mm

BLOCK KEY:

W = Wide poly block (485mm)
N = Narrow poly block (295mm)
C = 100mm thick poly inlay sheet (tolerance) cut after inserting block runs.

VENTILATION:

AB Denotes location of airbricks & vents.
Each airbrick offers not less than 6000mm² ventilation.

V Dennotes approx. position of vents to inner walls.

Floor to provide:- 1500mm² per metre run of external wall OR...
500mm² per square metre of floor area whichever is greater

ENSURE AIRBRICKS ARE POSITIONED AS SHOWN

Revision Schedule

Rev	Date	Description	Drn By
C1	01.12.25	Construction Issue	FDL

Ground Floor Beam Schedule


Qty	Length	Description	Weight (kg)
16	4350	B2 Prestressed Beam	144

GF Overlay Sheet Schedule

Location	Qty of Overlay Sheet	Qty of Poly Edge Strip (75mm high)
Ground Floor	36.28 m²	30.5 m

W - Wide Poly Block (485mm wide)
N - Narrow Poly Block (295mm wide)
C - 100mm thick poly inlay sheet (tolerance), cut after inserting block runs.

** Gas pipe route within the floor construction.

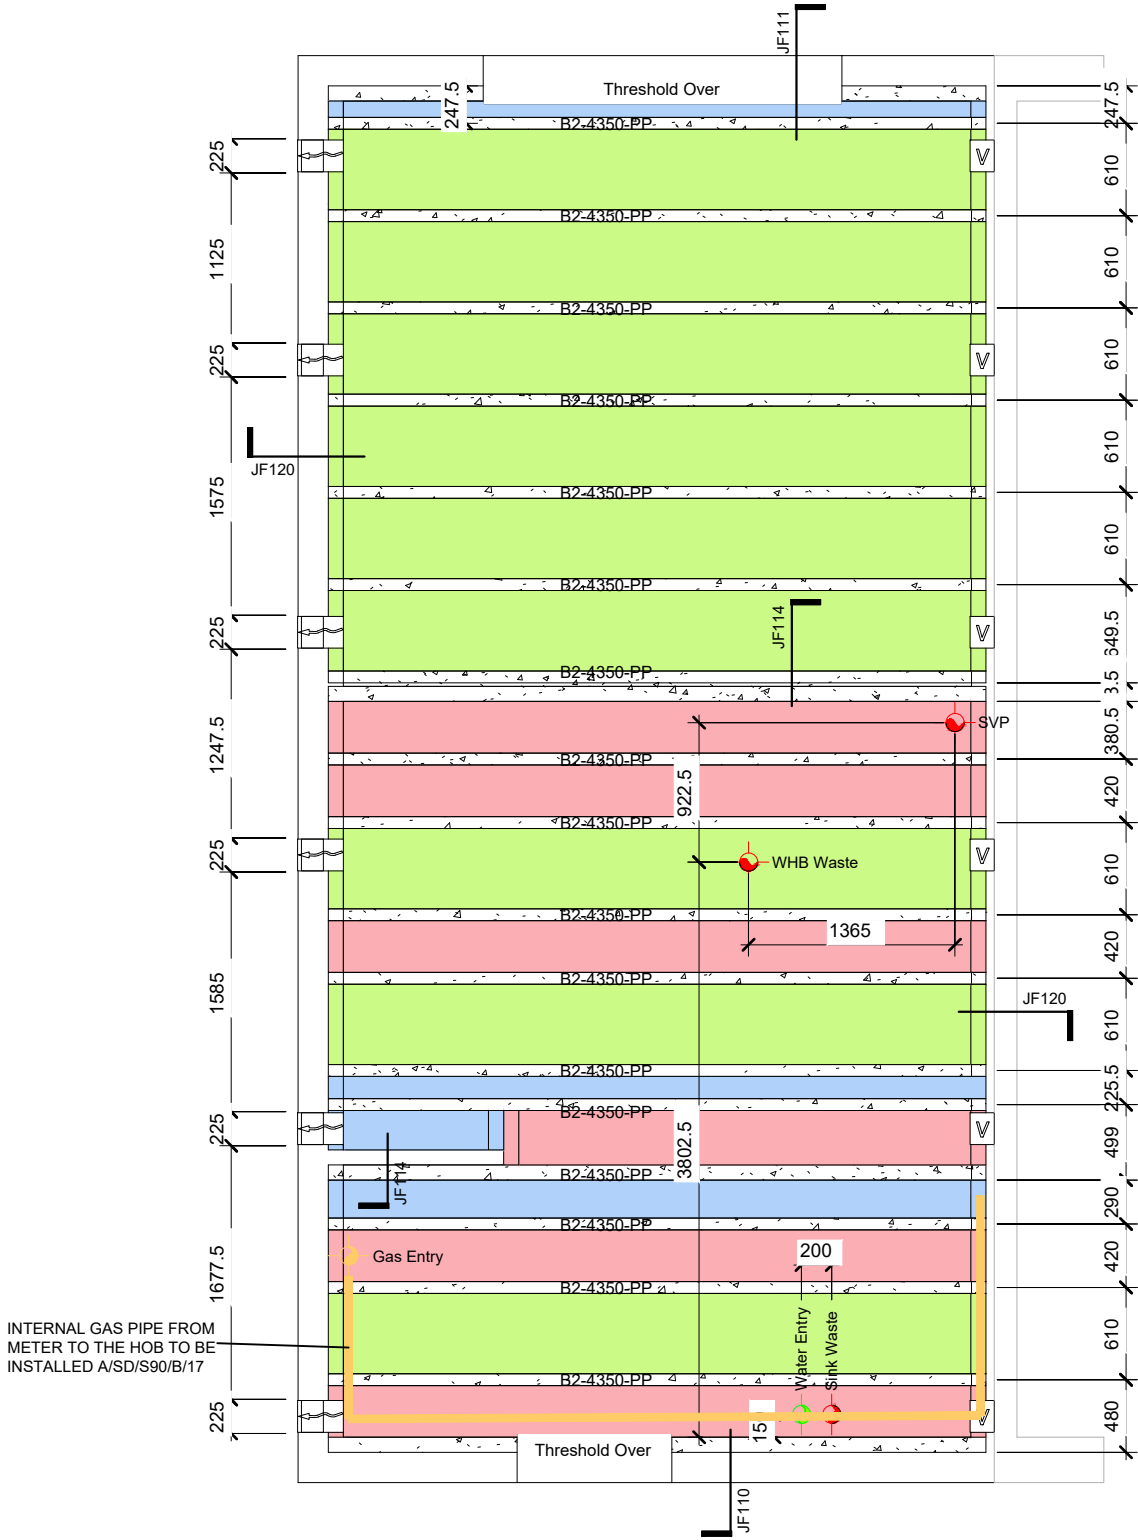

1 Beam Layout 1-50
1 : 50

Plots 10, 16, 41, 42 (AS) & 11, 17, 43 (OPP)

CONSTRUCTION

Bellway

www.bellway.co.uk

Bellway Homes (Eastern Counties)

Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Building Regulations
2013 & 2021
Compliant

Project
Somersham
St Ives Road
Working Drawings

Drawing Title
The Hooper-Life
790 ft² | 2b Semi/Terr | All Variants
Structural Floor Beam Layout

HPL-2B-2S-0

Drawing Created By Group	First Issue Date April '25	Scale(s) 1 : 50
Project No BI01	Drg Status Construction	Revision C1
Drawing No. BI01/790HP/30/0/04		

Do not scale - if in doubt, ask