

Revision Schedule			
Rev	Date	Description	Drn By
C1	01.12.25	Construction Issue	FDL

Standard Detail
A/SD/S80/A/08
A/SD/S80/C/02
(Roof Level Strap)

6no lateral restraint straps located at rafter level, at not greater than 2m centres. Fixed with the downturn on a substantial piece of blockwork, preferably fitted over the centre of an uncut block.


Straps to be fixed to a minimum of 3no trusses.

1no lateral restraint strap to be located as close to each ridge as possible providing a secure connection

5no lateral restraint straps located at ceiling level, at not greater than 2m centres. Fixed with the downturn preferably fitted over the centre of an uncut block.

Straps to be fixed to a minimum of 3no trusses

Standard Detail
A/SD/S80/A/08
A/SD/S80/C/02
(Ceiling Level Strap)

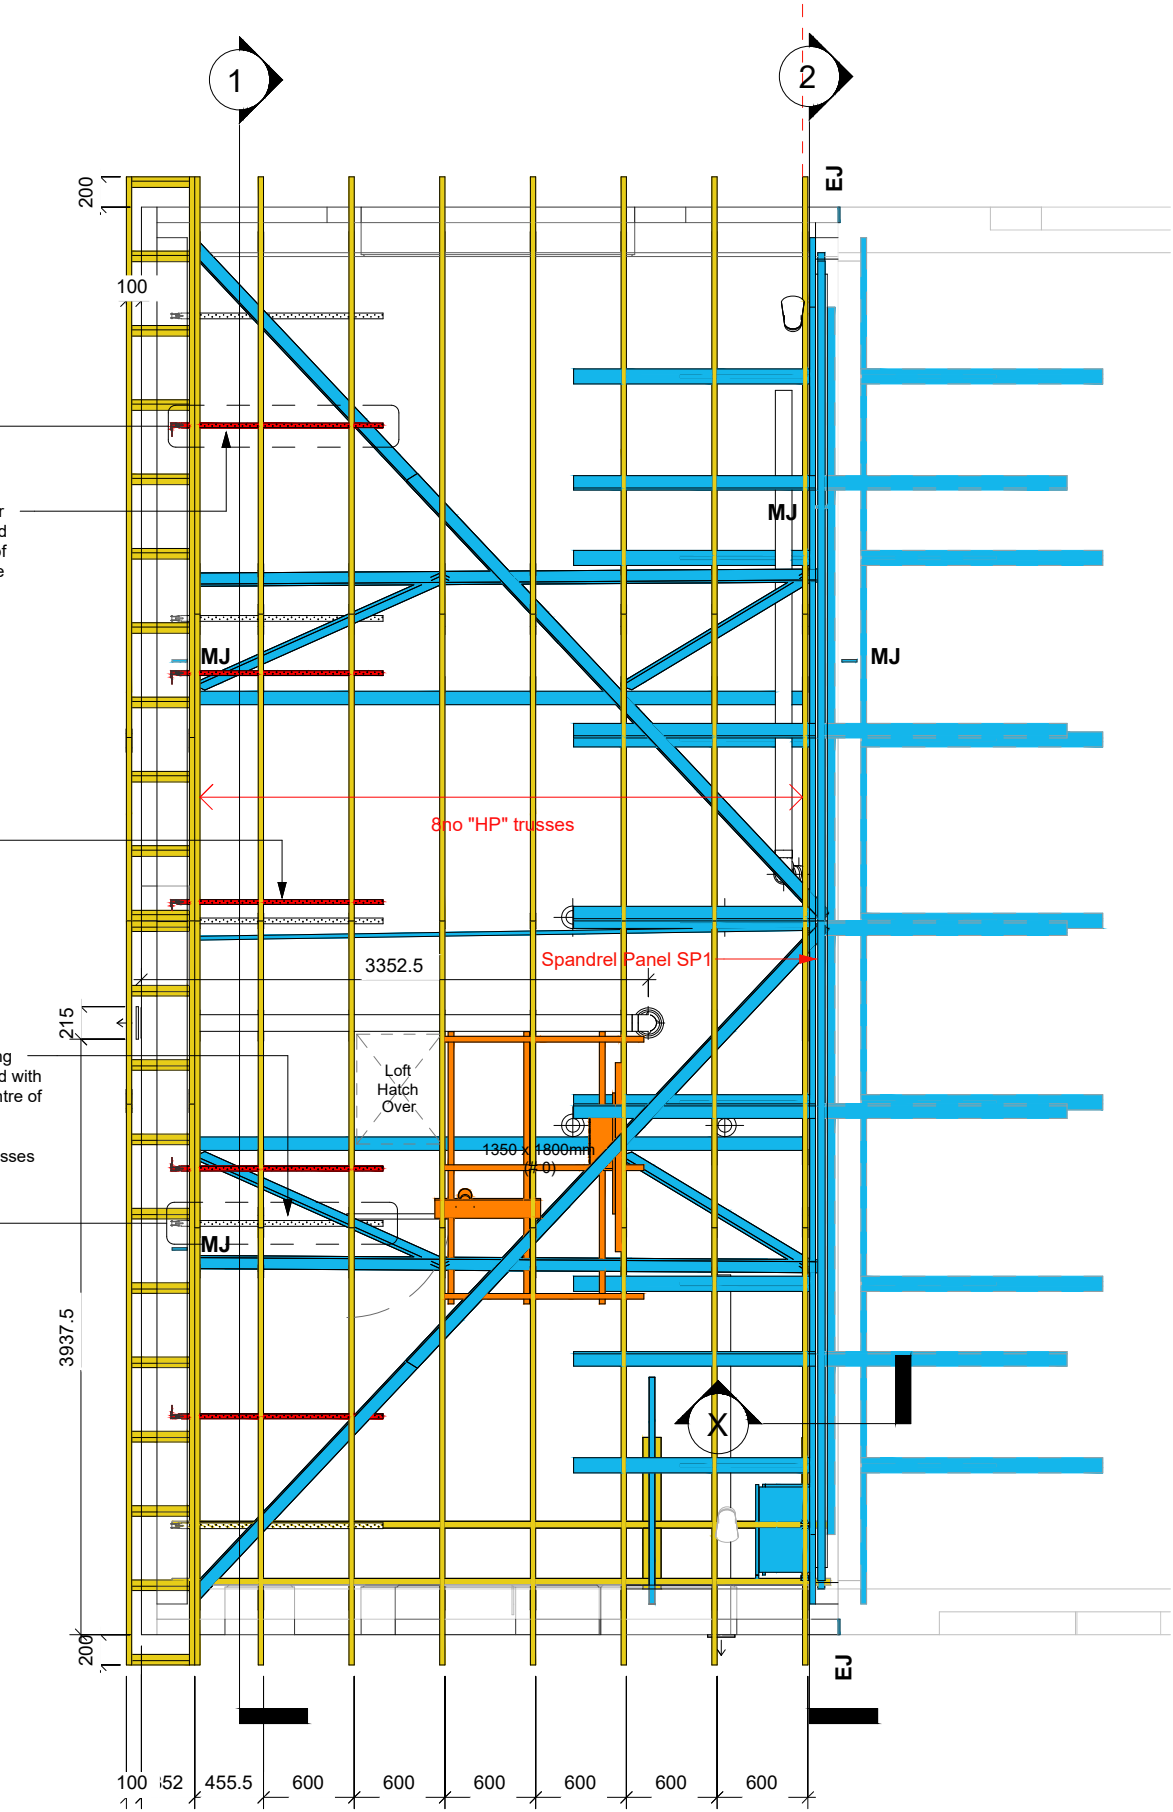

1 Roof Trusses - Semi Detached (Boxed Eaves) 1-50
1 : 50

Plots 10, 16, 41(AS) & 11, 17, 43 (OPP)

CONSTRUCTION

Bellway
www.bellway.co.uk

Bellway Homes (Eastern Counties)
Building 2030, Cambourne Business Park,
Cambridgeshire CB23 6DW
Tel: 01480 425 200

Building Regulations
2013 & 2021
Compliant

Project
Somersham
St Ives Road
Working Drawings

Drawing Title
The Hooper-Life **HPL-2B-2S-0**
790 ft² | 2b Semi/Terr | All Variants
Roof Layout - Semi Detached

Drawing Created By Group	First Issue Date April '25	Scale(s) 1 : 50
Project No BI01	Drq Status Construction	Revision C1
Drawing No. BI01/790HP/60/0/01		

Do not scale - if in doubt, ask